


touchONE-4

CS0594



CUE

Description


Top view




Bottom view

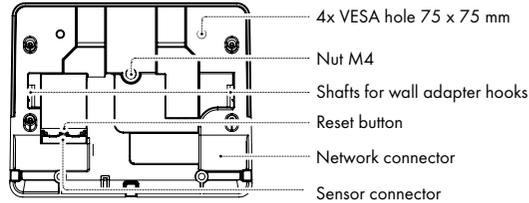

Side view

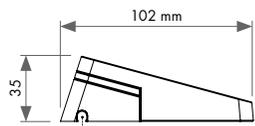

Rear view

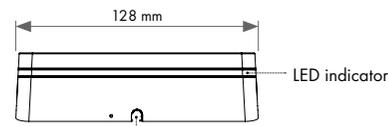

Cable bushing


Screw M4x30

Screw M4x30




Tabletop installation without fixation

Top view

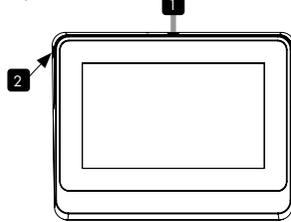


Side view




1. Insert the Ethernet cable into the selected cable bushing and plug it into the connector on the unit. You can use any cable bushing (rear, left, right) depending on where you need to route the cable.
2. Cover the other cable bushing with the supplied caps.
3. Place the unit on the table.

Tabletop installation with fixation

Side view Top view

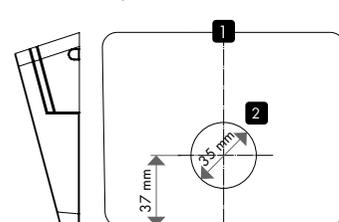


Side view



1. Define position of the unit.
2. Drill a hole with a diameter of 35 mm.
3. Select the screw according to the thickness of the table top and screw it into the unit.
4. Route the Ethernet cable through the hole in the table and plug it into the connector on the unit.
5. Place the unit on a table.
6. Place the round attachment on the screw.
7. Tighten the round attachment using the nut M4.

Connection

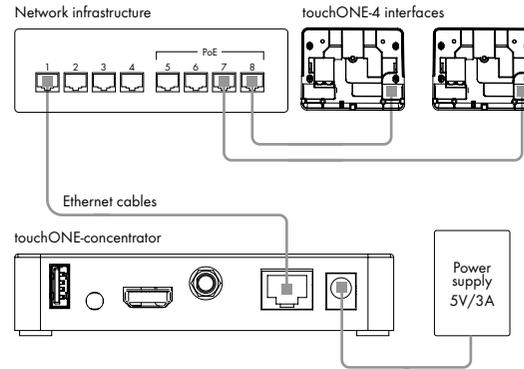

Factory Default Setup

When the Reset button is pressed longer than 5 sec., the factory default function is performed and setup is as follows:

- IP address: from DHCP (192.168.1.128 without DHCP)
- IP Mask: from DHCP (255.255.255.0 without DHCP)
- Password: Empty (no input required)

Initial Setup

Download the Setup Guide by scanning the QR code



User Manual


Complete user manual can be downloaded from <http://www.touchone.eu>

Box Contents


- Workplace reservation interface touchONE-4
- Ethernet cable
- Set of plastic caps
- Wall mounting adapter
- 4x screw M4x8
- Screw M4x30
- Screw M4x40
- Round attachment
- Nut M4
- Hexagonal Allen key
- Tabletop mounting adapter
- Cleaning tissue
- Quick Start
- Declaration of Conformity & Warranty Conditions

On-wall installation


Front view



Side view




Side view




1. Prepare standard electrical wall box with Ethernet cable.
2. Attach the wall adapter to the electrical wall box. Check its orientation as shown.
3. Fix the wall adapter with two screws compatible with specific wall box.
4. Route the Ethernet cable through the hole in the wall adapter and plug it into the connector on the unit.
5. Put the unit on the wall adapter using the hooks on the wall adapter.
6. Secure the unit by sliding it down.

On-wall un-installation

Side view



Side view



1. Insert the supplied hexagonal Allen key or thin screwdriver into the small hole at the bottom of the unit and push it inward. This releases the unit from the wall adapter.
2. Pull the bottom of the unit away from the wall.
3. Pull the unit upwards to pull it out of the wall adapter.
4. You can now remove the units from the wall and disconnect the cable.