

touchONE-overview

Reservation overview player

Product code: CS0510



Main features

- Standalone graphic player for reservation overview
- Compatible with Microsoft 365, Microsoft Exchange, Google Workspace, CUE Calendar, IceWarp, Zimbra and Kerio Connect
- Plug & Play solution
- HDMI output supports Full HD and 4K resolution
- Landscape or portrait display orientation
- Compliant with HDMI 2.0
- Single cable Ethernet connection
- 802.1X authentication mechanism supported
- Proxy Server support
- Power over Ethernet power supply
- Fanless operation
- Small dimensions, low profile surface mountable
- Simple installation close to display device

Description

CUE System is a meeting room reservation system. The CUE System Reservation panels are installed in front of the entrance to the room and show their state. The touchONE-overview unit makes it possible to join a large display that will show the states of several rooms at once, e.g. at receptions.

The display connected to the touchONE-overview unit shows the following information:

- Room name and information on occupancy. The state of the room is indicated by green color for a free room and red for an occupied room.
- If the room is free, the display shows the next meeting on the given day (if such a meeting is planned) and the period in which it will start.
- If the room is occupied, the display shows the subject of the meeting as well as its starting and ending times.
- If the timeline mode is enabled, the display shows a timeline with future meetings for the next few hours.

Specifications

CPU

- i.MX 8M Quad application processor
- Quad Arm® Cortex®-A53 core at 1.5 GHz

Memory

- RAM 4 GB
- Flash 32 GB

Button

- System default

Indicator

- Power LED

Firmware

- Room reservation overview
- Admin web for setup

Network

- 10/100/1000 BaseT LAN, RJ-45 connector
- 802.1X authentication mechanism supported
- Proxy Server support

USB

- USB 1 Host for USB HID-compliant touch screens
- For proper use see power supply specifications

AV connection

- HDMI output - HDMI 2.0a-compliant
- Resolution Full HD (1920 x 1080) or 4K (3840 x 2160)

Other connections

- Not supported by the application

Power supply

- Power over Ethernet (PoE)
- PoE IEEE 802.3af / Class 0 for one USB usage, max. 0.5 A output (USB2 mode)
- PoE+ IEEE 802.3at / Class 4 for both USBs usage, max. 0.9 A output each (USB3 mode)


Physical

- Slim aluminum enclosure for the back of screen installation
- Protection IP30
- Dimensions 153.5 x 125 x 25 mm / 6.0" x 4.9" x 1.0"
- Weight 0.4 kg / 0.9 lb

Environment conditions

- Operating temperature 10° to 40° C, ambient with airflow
- Storage temperature 0° to 60° C
- Relative humidity 10% to 90% non-condensing

Mechanical description

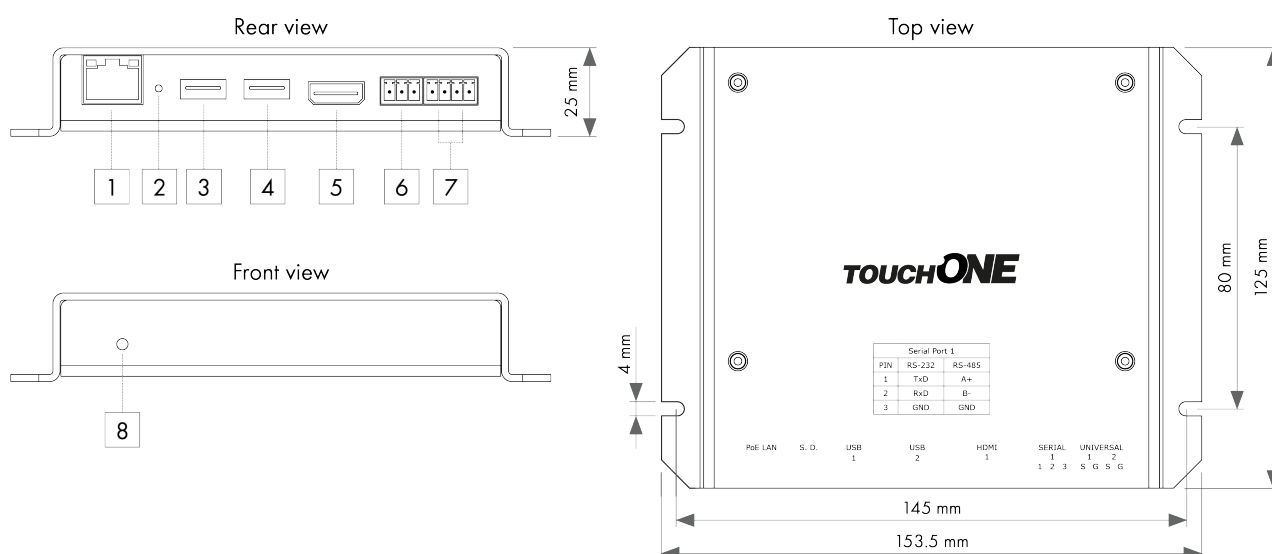

1. Network connector
2. Reset button
3. USB Host 1
4. USB Host 2
5. HDMI output
6. Serial port RS-232/485
7. 2x Universal port
8. Power indicator



Serial port RS-232/485, and Universal ports are not supported by the application.

Box contents

- touchONE-overview unit
- Mounting accessories
- Ethernet cable
- Quick Start

Order information

Product code CS0510

The one-time price includes the complete unit incl. ready to use reservation overview application, mounting accessories, future firmware upgrades, two years standard warranty, and product support. No annual license fee is required.

Documentation

More information can be found in CUE Documentation:

- Manual - CUE Reserve description part Reservations overview
- touchONE Layout Design Guide
- touchONE-overview Quick Start (R03)